




Round Washer: Six-Lobe
Truss: Six-Lobe & Square Recess


HEAD DIMENSIONS



Truss Six-Lobe




Round Washer Six-Lobe



SIX-LOBE RECESS DRIVE TRUSS HEADS								ASME B18.6.3- 2010	
Screw Size	Head Dimensions				Recess Dimensions			Driver Size	
	Head Diameter		Head Height		Ref	Gauge Penetration Min	(Fallaway) Max Penetration		
	Max	Min	Max	Min					
	6	.321	.303	.086	.074	.111	.045		.022
8	.384	.364	.102	.088	.132	.045	.026	T15	
10	.448	.425	.118	.103	.155	.055	.031	T20	
1/4	.573	.546	.150	.133	.200	.070	.040	T27	

SIX-LOBE RECESS ROUND WASHER HEAD										ASME B18.6.3- 2010	
Nominal Screw Size	Washer Outside Diameter		Washer Thickness	Head Outside Diameter	Overall Head Height		Recess Diameter	Gauge Penetration		(Fallaway) Max Penetration	Driver Size
	Max	Min	Ref	Ref	Max	Min	Ref	Max	Min		
	8	.380	.358	.040	.259	.113	.101	.155	.065		

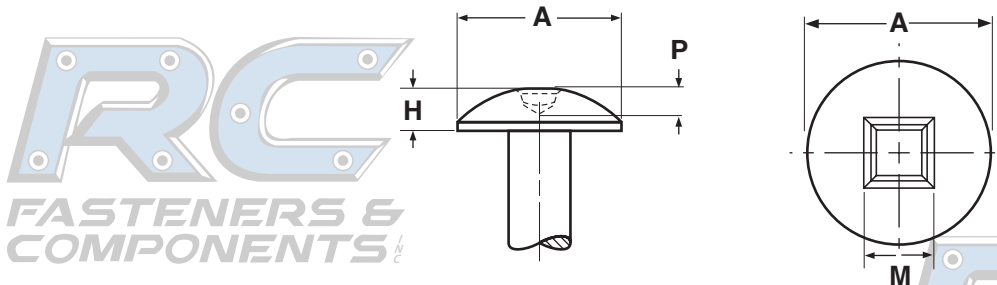

TRUSS SQUARE RECESS HEADS FOR TAPPING SCREWS								ASME B18.6.3-2010	
Nominal Size	A		H		M	Recess Penetrating Gaging Depth	P		
	Head Diameter		Head Height		Recess Across Flats		Max	Min	
	Max	Min	Max	Min	Ref				
4	.257	.241	.069	.059	.070	0	.038	.028	
6	.321	.303	.086	.074	.091	1S	.055	.040	
8	.384	.364	.102	.088	.112	2S	.063	.048	
10	.448	.425	.128	.113	.112	2R	.075	.060	
1/4	.573	.546	.150	.133	.133	3S	.080	.065	